
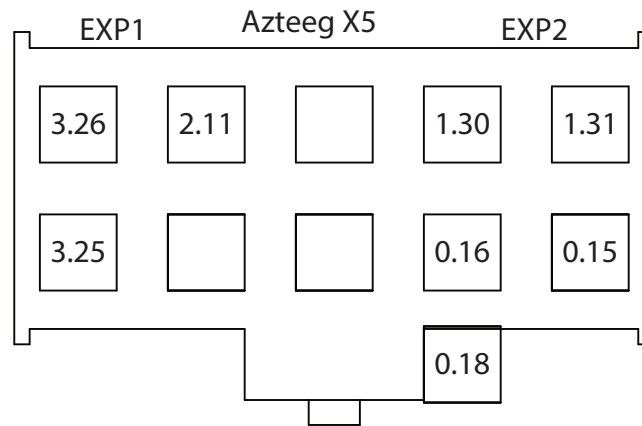

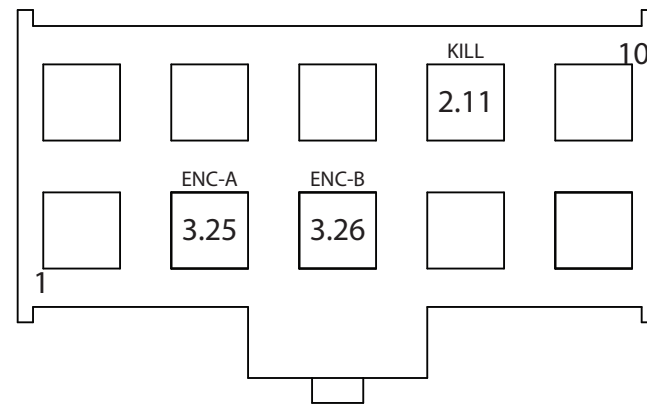


## RepRapDiscount GLCD

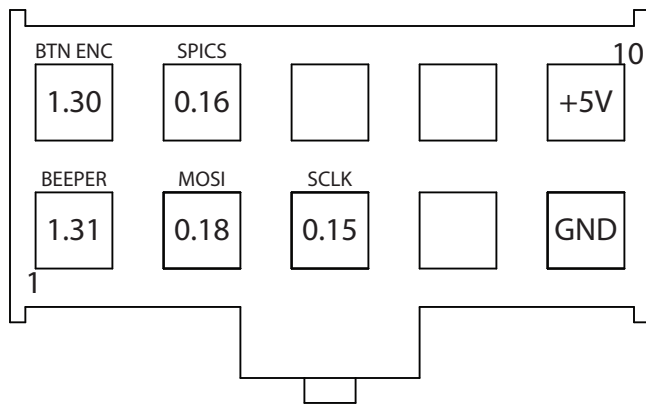

# Example for reprap discount GLCD

# on glcd EXP1 is to left and EXP2 is to right, pin 1 is bottom left, pin 2 is top left etc.

# +5v is EXP1 pin 10 , Gnd is EXP1 pin 9

```

panel lcd          reprap_discount_glcd #
panel.spi_channel  0          # spi channel to use ; GLCD EXP1 Pins 3,5 (MOSI, SCLK) (P0_18,P0_15)
panel.spi_cs_pin   0.16       # spi chip select ; GLCD EXP1 Pin 4
panel.encoder_a_pin 3.25!^    # encoder pin ; GLCD EXP2 Pin 3
panel.encoder_b_pin 3.26!^    # encoder pin ; GLCD EXP2 Pin 5
panel.click_button_pin 1.30!^ # click button ; GLCD EXP1 Pin 2
panel.buzz_pin     1.31       # pin for buzzer ; GLCD EXP1 Pin 1
panel.button_pause_pin 2.11^  # kill/pause ; GLCD EXP2 Pin 8 either
#panel.back_button_pin 2.11!^ # back button ; GLCD EXP2 Pin 8 or
    
```